


WET/ecopixel®

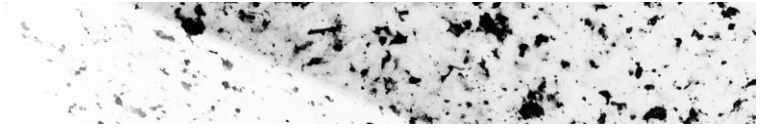

ECOPIXEL datasheet 2020

ECOPIXEL is a recycled thermoplastic mono-polymer material. (1) 3D moulded products (2) SHEET tiles of various size & thickness (3) Injected products. ECOPIXEL comes in a range of multi-color & pixelated effects (except for the injected version). Following availability of waste-materials it offers different possibilities. Please check www.ecopixel.eu for updated information.

ASTM or UL test	Property	units
D792	Density	0,92 kg-m3
D570	Water Absorption 24 hrs	> 0,01
D785	Hardness, shore D	D45
D648	Max Operating Temp	60 °C
D3418	Melting Temperature	118 °C
UL94	Flammability	HB
ECOPIXEL 3D moulded	irregular* material thickness	6 - 8 mm
ECOPIXEL sheet	various sheet thickness	10 - 12 - 15 mm
ECOPIXEL injection	irregular material thickness	2 - 4 mm

Jan Puylaert
ECOPIXEL Direction

WET/ecopixel
Via Altipiano 11, 21010 Porto Valtravaglia (VA) Lago Maggiore – ITALIA
mob. + 39 3452107207 | www.ecopixel.eu – info@ecopixel.eu
WETSrl - P.IVA = CF 03031780129